



**FW MURPHY®**  
PRODUCTION CONTROLS



Official FW Murphy Distributor  
**PT. ATAMORA TEHNIK MAKMUR**

## OPL Series Pressure Gauges



The OPL Series pressure gauge instruments are combination pressure-indicating gauges with adjustable low and high limit switches.

- Combination indicating gauge and critical pressure limit switches
- High and low pressure limit contacts are visible and adjustable
- Panel- and surface-mount versions
- Indicating-only gauge available
- Latching control relay versions available

### Overview


The OPL Series limit switches can be wired directly to electric pilot circuits to operate alarms, shutdown or the start/stop of engines and electric motors. Surface-mount or panel-mount enclosures are available for most versions. All versions feature a 4-1/2 in. (114 mm) dial for easy viewing. Adjustable limit switches are accessible from the front of the gauge. Limit contacts have self-cleaning motion to enhance electrical continuity.

Other versions available:

- Gauge only without contacts
- Gauge instrument with built-in latching relay for start-stop operations.

### Specifications

- **Case:** Die cast aluminum; weatherproof
- **Contact Ratings:**
  - OPLC and OPLFC – 1 SPDT; Center off; 2A, 30 VDC / 1A, 125 VAC
  - OPLBP – SPDT dry relay contacts; 10A, 125 VAC
- **Dial:** 4-1/2 in. (114 mm) white on black, dual scaled psi /kPa
- **Gage Accuracy:** 2-1-2  $\pm 2\%$  for the first and last quarters of the scale, the middle half is  $\pm 1\%$
- **Geared Movement:** 302 and 304 stainless steel
- **Lens:** Optically clear polycarbonate
- **Pointer:** High visibility with a pointer calibration hub
- **Process Connection:** Available in 1/4 NPT and 1/2 NPT
- **Sensing Element:** Select from bronze or 316 stainless steel bourdon tube

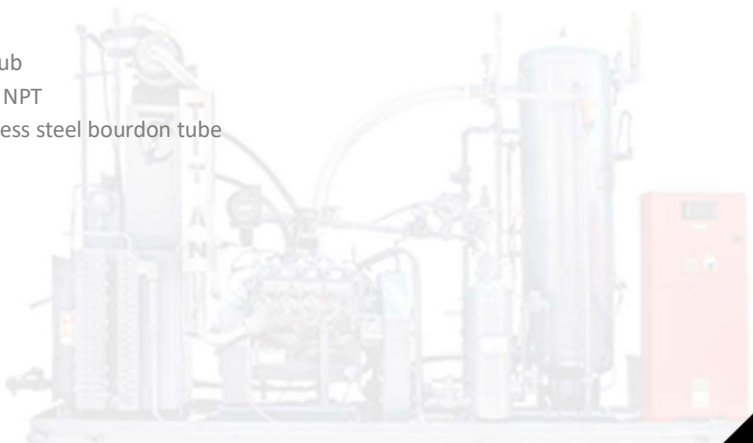

#### HEAD OFFICE, MARKETING & BUSINESS DEVELOPMENT

Equity Tower, 25th Floor, Suite 25F, SCBD Lot 9,  
Jl. Jend. Sudirman Kav. 52-53, Jakarta Selatan, 12190 - Indonesia  
Phone : (021) 5154560, 5154561, Fax: (021) 6326748, 5154563  
Mobile Phone : 081310787177 (Products)  
email : products@atamora.co.id | atamora@atamora.co.id

#### OPERATION OFFICE

Jl. Ternate 21H, Jakarta Pusat 10150 - Indonesia  
Phone: (021) 6326740, 6327177 (Hunting)



<https://www.atamora.co.id>



@atamoraofficial

# Pressure Gage

## OPL Series 4-1/2 in. (114mm) Diameter Dial

The OPL Series pressure gage instruments are combination pressure indicating gages with adjustable low and high limit switches. Limit switches can be wired directly to electric pilot circuits to operate alarms, shutdown or the start/stop of engines and electric motors. Surface mount or panel mount enclosure is available for most versions. All versions feature a 4-1/2 in. (114 mm) dial for easy viewing. Adjustable limit switches are accessible from the front of the gage instrument. Limit contacts have self-cleaning motion to enhance electrical continuity.

Other versions available (details on next page):

- Gage only without contacts
- Gage instrument with built-in latching relay for start-stop operations.

### Specifications

**Case:** Die cast aluminum; weatherproof

**Contact Ratings:**

OPLC & OPLFC: 1 SPDT; Center off; 2A, 30VDC / 0.1 A, 125 VAC  
 SPDT dry relay contacts; 10A, 125 VAC

**Dial:** 4-1/2 in. (114 mm) white on black, dual scaled psi /kPa

**Gage Accuracy:** 2-1-2; ±2% for the first and last quarters of the scale, the middle half is ±1%

**Geared Movement:** 302 and 304 stainless steel

**Lens:** Optically clear polycarbonate

**Pointer:** High visibility with a pointer calibration hub

**Process Connection:** Available in 1/4 NPT and 1/2 NPT

**Sensing Element:** Select from bronze or 316 stainless steel bourdon tube



1 Selected configurations are third-party listed. Consult factory for details.

2 Options not available on all models or configurations.

3 Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility as noted.



### Product Selection Information

**WARNING:** Selection of the proper gage instrument should include consideration for the service application, the medium being measured, electrical ratings, hazardous area requirements and general operating conditions. Improper selection and/or application may be detrimental to the gage instrument and could cause failure in the operating system and possibly personal injury or property damage. If in doubt, consult our sales/engineering staff.

## Base Models



### OPLC

The **OPLC** is a surface mount, indicating pressure gage and switch. Adjustable high and low limit, ungrounded contacts are used to operate alarm, shutdown or start-stop circuits. Pointer closure against either of the adjustable contacts completes the pilot-duty circuit. An SPST toggle switch is provided to override the low limit contact for equipment startup. Suitable for engines or electric motors with appropriate magnetic switch or transformer relay assembly.



### OPLFC and OPLFG

The **OPLFC** is a panel mounting version of the OPLC. It has all of the features of the OPLC except the low limit contact lockout. The lockout must be done externally through the control circuit. The OPLFC is typically used in control panels for compressors, pumps, etc. This version can be environmentally sealed with either the ES or OS options. Contact lead termination is by pigtail wires.

The **OPLFG** is an indicating only pressure gage instrument. Same as the OPLFC except without switch (limit) contacts.





<sup>1</sup> Selected configurations are third-party listed. Consult factory for details.

<sup>2</sup> Options not available on all models or configurations.


<sup>3</sup> Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility as noted.

## Electrical and Dimensions

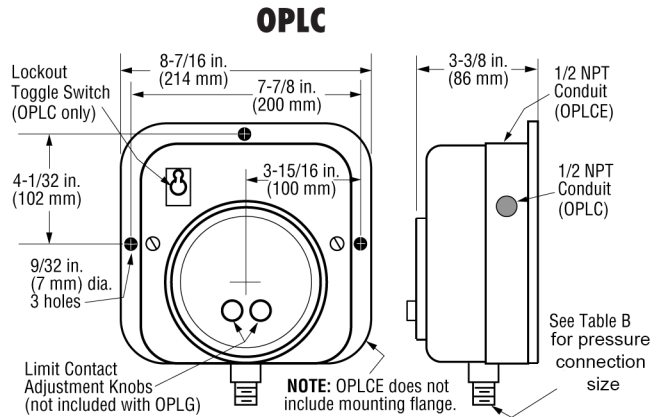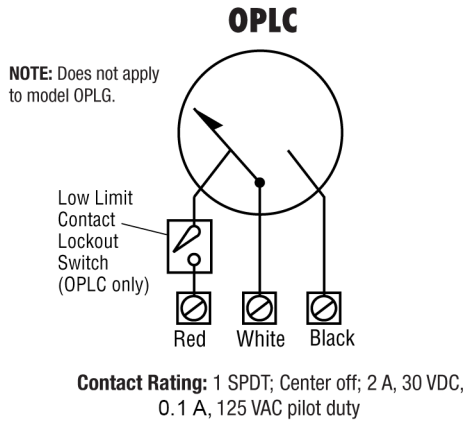


### OPLFC

**NOTE:** Does not apply to model OPLFG.

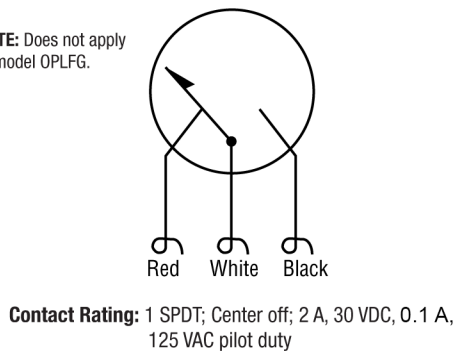


### OPLFC and OPLFG

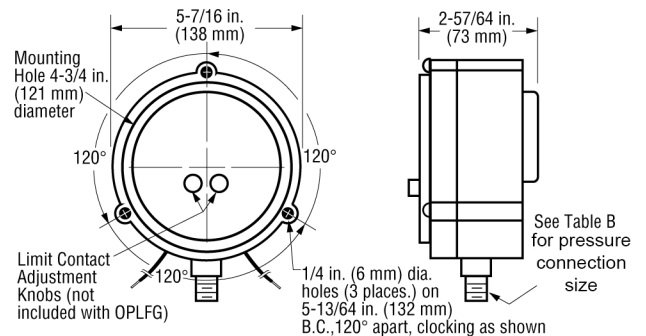

## Options and Accessories

### Tamper-proof Contact Accessory

Part Number 05000610

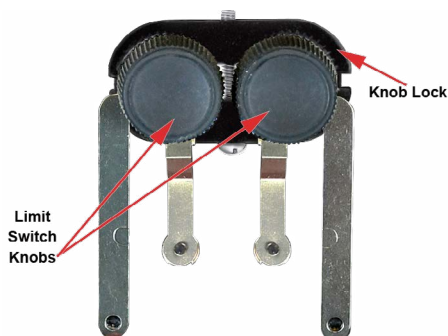

### Pulsation Dampener

- Eliminate pointer contact flutter on pressure gage and instruments which are subject to pulsating pressure from reciprocating pumps or compressors.
- Allow close high-low contact settings for more accurate pressure indication and equipment control.
- Decrease wear on internal geared movement and increase the life of your instrument by eliminating excessive strain and unnecessary pointer movement.
- Available in brass, carbon steel and stainless steel.
- **Must be ordered separately.**



# How to Order

Options listed below. All configurations may not be available. Call your sales representative or FW Murphy for more information.

OPLBP

-

S

-

1000

-

BC

Base Models

OPLC = Gage, surface mount, with low limit lockout switch

OPLFC = Gage, panel mount

OPLFG = Gage, panel mount

Bourdon Tube and Socket Material/Size

Code	Connection	Tube and Socket Material	Tube Type	Range Selection Limits
A	= 1/4 NPT	Grade A Phosphor Bronze Tube Brass Socket (Brass Tip, Silver Brazed)	C-Tube	Thru 1000 psi
S	= 1/4 NPT	316 Stainless Steel Tube and Socket	C-Tube	Thru 1000 psi
S	= 1/2 NPT	316 Stainless Steel Tube and Socket	Drawn Helical	1500-10000 psi

NOTE: All Bourdon Tube and Tip Joints TIG Welded Except A

Ranges

Code	Vacuum/psi
30V15	= 30" vac-15 psi
30V30	= 30" vac-30 psi
30V100	= 30" vac-100 psi
30	= 0-30 psi
60	= 0-60 psi
100	= 0-100 psi
160	= 0-160 psi
200	= 0-200 psi
300	= 0-300 psi
400	= 0-400 psi
600	= 0-600 psi
1,000	= 0-1,000 psi
1,500	= 0-1,500 psi
2,000	= 0-2,000 psi
3,000	= 0-3,000 psi
5,000	= 0-5,000 psi
10,000	= 0-10,000 psi
20,000	= 0-20,000 psi (10 piece minimum)

Dials  
All dials are dual scaled psi and kPa/MPa. Single scale dials and custom dials available. Additional charges may apply.

Gages  
All 4-1/2 inch (114 mm) gage instruments are available for Class I, Division 1, Groups C & D hazardous applications.

Division 2 locations can also be covered by our Non-Incendive or Intrinsically Safe systems. Contact FW Murphy representative for complete details.

Options

Verify Option Availability, Not All Options Can Be Provided For Every Model.

BC = Back Connected Bourdon Tube

ES = Environmentally Sealed

EX = Explosion-Proof; gage enclosed with Explosion-Proof Case; Class I, Div.1, Groups C & D

EL = (EXLC) Explosion-Proof Less Case

OS = Oil-Sealed Case

Approximate Shipping Weight and Dimensions

Model	Weight	Dimension
OPLC	5 lbs 9 oz (2.5 kg)	9-1/2 x 9-1/4 x 5-3/4 in. (241 x 235 x 146 mm)
OPLFC	3 lbs 4 oz (1.5 kg)	9-1/4 x 8-1/4 x 5-1/2 in. (235 x 210 x 140 mm)
OPLFG	3 lbs 4 oz (1.5 kg)	9-1/2 x 9-1/4 x 5-3/4 in. (241 x 235 x 146 mm)

Some options could alter shipping weights and dimensions. Consult factory.